


ELECTRA ENCLOSURE 300NB POWER & WATER BOLLARDS

PRODUCT NAME ELECTRA ENCLOSURE 300NB POWER & WATER BOLLARDS			
Mode	Baseplate Fixed Single Door	Baseplate Fixed Double Door	Wall Thickness (pipe)
Steel Model #	ELE301B-ST	ELE302B-ST-PW	6.4mm
Stainless Steel Model #	ELE301B-SS4 to s	SS6 for ELE302B-SS4-PW to	hange PP for 4.57mm
Steel with Vandal Door Model #	ELE301BV-ST	de 316 ELE302BV-ST-PW behi	er Power Ind both 6.4mm loors
Stainless with Vandal Door Model #	ELE301BV-SS4	ELE302BV-SS4-PW	4.57mm
Two door models: Default Service behind each bollard is Power Water. Change to Power+Power (-PP) if bottom door is to be power.			
Nominal Bore (NB)	300NB		
Outside Diameter	Steel 323.9mm Stainless Steel 323.4mm		
Height Above Ground	1115mm including baseplate		
Material Steel Stainless Steel	Heavy Duty Galvanised Pipe Stainless Steel Grade 304 or SS6 for Marine Grade 316 Stainless		
Baseplate Dimensions	Diam. 444mm x 8mm – Four pre-punched holes.		
Mounting Plate (for internal gear)	150mm x 450mm height - 3mm thickness – Galvanised – Pre-punched mounting plate to accommodate 2, 4, 6 & 8 standard mounting enclosures		
Finish - Steel	Hot Dip Galvanised or electrostatically powdercoated in a range of colours		
Finish - Stainless Steel	Linished or electro-polished		
Options & Accessories	Keying Alike, Class 1 or 2 Reflective Tape, Spare backing plate (retrofitting new gear)		
Installation	4 x M12 - 100mm Chemset anchors (Galvanised) or stainless depending on model being installed.		

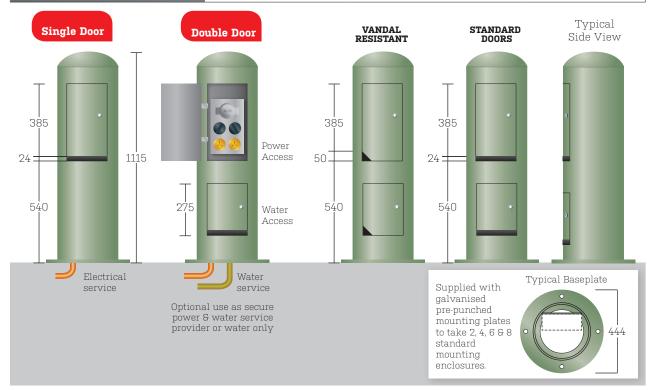

ELECTRA ENCLOSURE 300NB POWER & WATER BOLLARDS